


# WebPass LITE



## Specifications

- Built-In dry contact and I/O for input & output devices
- Operation Temperature : 0 ~ 70°C
- Operation Humidity : 30% ~ 90%
- Power requirement : 9 ~ 24VDC/1A
- Dimension : 120 X 80 X 25 (mm) / 150g
- WebPass-Lite (RS485 & WIEGAND)
  - Cardholder capacity : 1,500 users
  - Log entry capacity : 1,500 entries
  - Standalone (RS485) or Reader mode (WIEGAND) support

## Application :

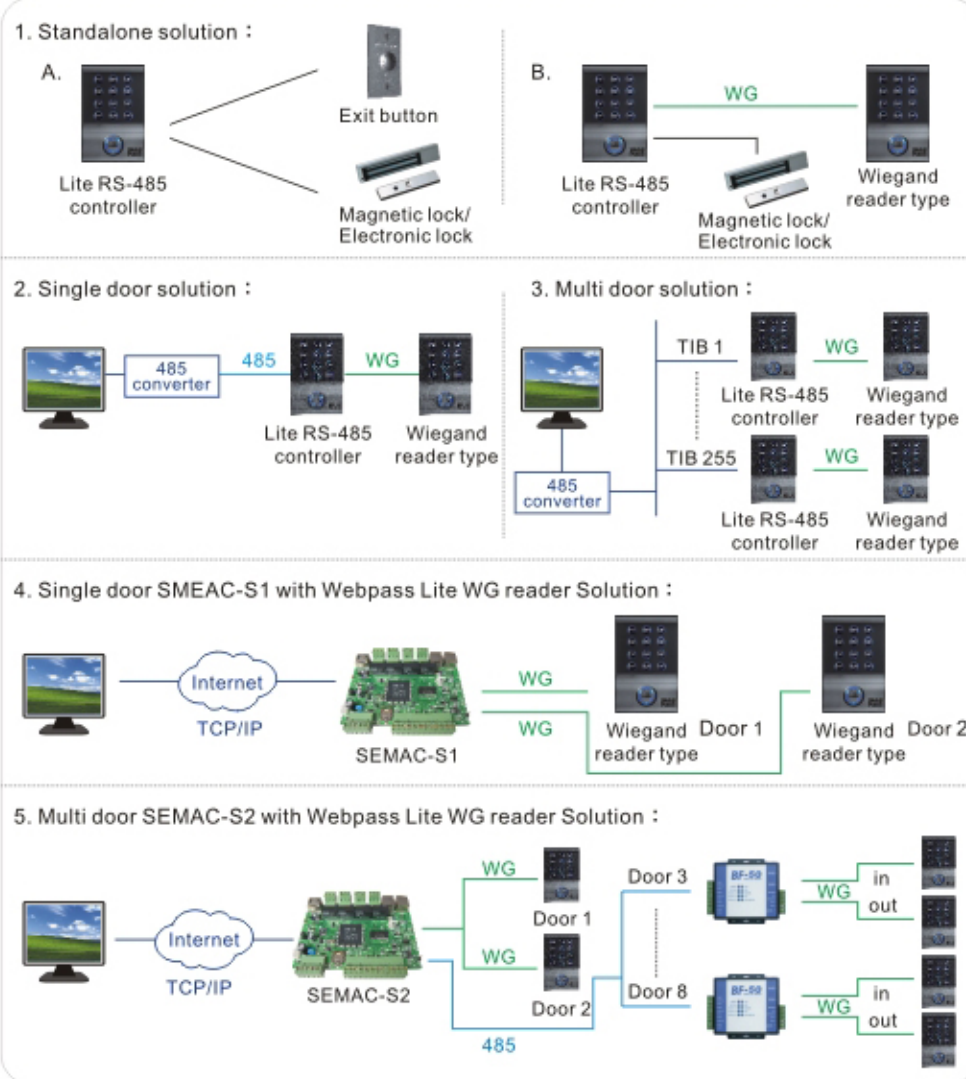

## How to order :

Model	Type	Application	Contact format
WEBPASS LITE-S Standalone	EM/ Mifare/ Others	Standalone RS-485 connection Multi door control software	DC9~24V (500mA) Lock Relay x1 Open contact x1 Sensor contact x1 Fire Alarm Input x1
WEBPASS LITE-R Wiegand reader		WG 26/ 34 Password Control Buzzer & LED	DC9~24V(300mA) WG OUT x1 Buzzer Control x1 LED Controlx1

• Due to continuous product enhancement, Sin Chew Alarm reserves the right to change / modify specification without prior notice.