



EXPANSIBLE COLOUR VIDEO DOOR PHONE & MONITORING SYSTEM

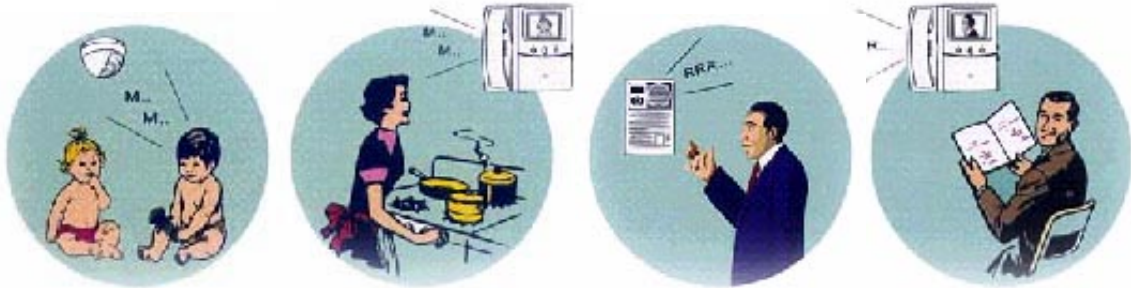


- Video & Audio Monitoring From Anywhere to Anywhere

M248-BASIC EXPANDABLE TO \longrightarrow 4 CAMERAS (DOOR CAMERAS and/or DOME CAMERAS) plus 8 MONITORS (MAIN MONITOR and SLAVE MONITORS)

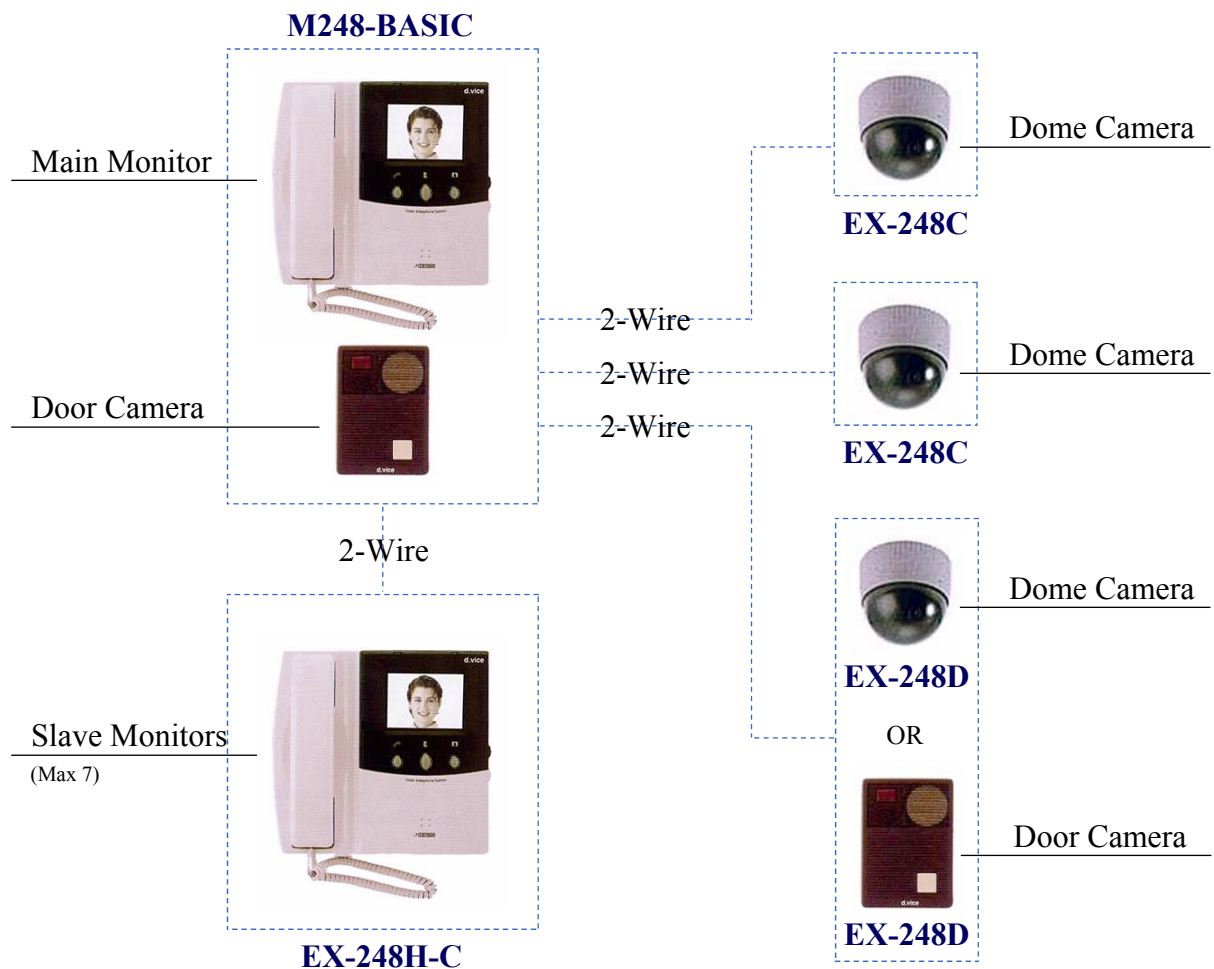

**COMPLETE 1-ON-1 PACKAGE
WITH COLOUR SCREEN
M248-BASIC**

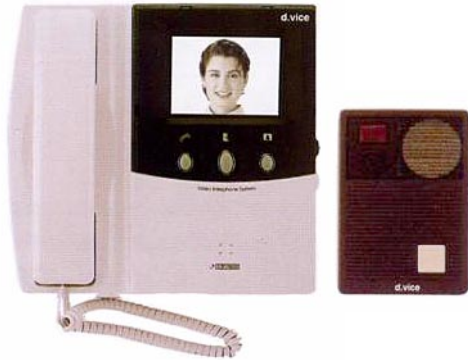


M248-BASIC - MAIN MONITOR (COLOUR)

Power	Input: 100-240V ~ 1.0A MAX, 50-60Hz Output: +24V == 0.75A
Audio	Two Way
Display	4" Flat Type CRT
Resolution	420 TV Lines
Memory	Max. 32 Pictures
Size	235 x 220 x 75 (mm)
Installation	Wall Mount

M248-BASIC - DOOR CAMERA

Power	From Monitor
Camera	1/3" CCD
Lens	F3.6, Wide Angle Horizontal Manually Adjustable
Illumination	IR Supplement
Wiring	2 Regular Wires (Power Included)
Distance	0.65mmø (AWG22) - 60M 1.0mmø (AWG18) - 100M
Temperature	-20C ~ 70C
Case	Metal, Weather Proof
Size	140 x 100 x 42 (mm)
Installation	Wall Mount

SLAVE MONITOR / EX-248H-C



Power	Input: 100-240V ~ 1.0A MAX, 50-60Hz Output: +24V == 0.75A
Audio	Two Way
Display	4" Flat Type CRT
Resolution	420 TV Lines
Memory	Non
Size	235 x 220 x 75 (mm)
Installation	2 wires, Wall Mount

DOOR CAMERA / EX-248D



Power	From Monitor
Camera	1/3" CCD
Lens	F3.6, Wide Angle Horizontal Manually Adjustable
Illumination	IR Supplement
Wiring	2 Regular Wires (Power Included)
Distance	0.65mmø - 60M / 1.0mmø - 100M
Temperature	-20C ~ 70C
Case	Metal, Weather Proof
Size	140 x 100 x 42 (mm)
Installation	Wall Mount

DOME CAMERA / EX-248C



Power	From Monitor
Camera	1/3" CCD
Lens	F3.6, Wide Angle
Illumination	2 LUX
Wiring	2 Regular Wires (Power Included)
Distance	0.65mmø - 60M / 1.0mmø - 100M
Size	90 x 90 x 90 (mm)
Installation	Surface Mount

* Due to continuous product enhancement, Sin Chew Alarm reserves the right to change / modify specification without prior notice.